

*NRSC  
STANDARD*

# NATIONAL RADIO SYSTEMS COMMITTEE

**NRSC-2-B  
Emission Limitation for Analog AM  
Broadcast Transmission  
September, 2012**



NAB: 1771 N Street, N.W.  
Washington, DC 20036  
Tel: (202) 429-5356 Fax: (202) 775-4981



CEA: 1919 South Eads Street  
Arlington, VA 22202  
Tel: (703) 907-7660 Fax: (703) 907-8113

Co-sponsored by the Consumer Electronics Association and the National Association of Broadcasters  
<http://www.nrscstandards.org>

## NRSC-2-B

### NOTICE

NRSC Standards, Guidelines, Reports and other technical publications are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for his particular need. Existence of such Standards, Guidelines, Reports and other technical publications shall not in any respect preclude any member or nonmember of the Consumer Electronics Association (CEA) or the National Association of Broadcasters (NAB) from manufacturing or selling products not conforming to such Standards, Guidelines, Reports and other technical publications, nor shall the existence of such Standards, Guidelines, Reports and other technical publications preclude their voluntary use by those other than CEA or NAB members, whether to be used either domestically or internationally.

Standards, Guidelines, Reports and other technical publications are adopted by the NRSC in accordance with the NRSC patent policy. By such action, CEA and NAB do not assume any liability to any patent owner, nor do they assume any obligation whatever to parties adopting the Standard, Guideline, Report or other technical publication.

This NRSC Standard is considered to have International Standardization implication, but the International Electrotechnical Commission activity has not progressed to the point where a valid comparison between the NRSC Standard and the IEC document can be made.

This Standard does not purport to address all safety problems associated with its use or all applicable regulatory requirements. It is the responsibility of the user of this Standard to establish appropriate safety and health practices and to determine the applicability of regulatory limitations before its use.

Published by  
CONSUMER ELECTRONICS ASSOCIATION  
Technology & Standards Department  
1919 S. Eads St.  
Arlington, VA 22202

NATIONAL ASSOCIATION OF BROADCASTERS  
Science and Technology Department  
1771 N Street, NW  
Washington, DC 20036

©2012 CEA & NAB. All rights reserved.

This document is available free of charge via the NRSC website at [www.nrscstandards.org](http://www.nrscstandards.org). Republication or further distribution of this document, in whole or in part, requires prior permission of CEA or NAB.

## NRSC-2-B

### FOREWORD

This Standard was developed by the National Radio Systems Committee (NRSC) and first published on June 1, 1988. It was incorporated into Section 73.44 of the FCC Rules in 1989 as a part of the *First Report and Order to FCC*, Mass Media Docket No. 88-376. The first revision (NRSC-2-A) was developed by the AM Broadcasting (AMB) Subcommittee of the NRSC, co-chaired by Stanley Salek, Hammett & Edison, Inc., and Jeff Littlejohn, Clear Channel Broadcasting, Inc. This second revision (NRSC-2-B) was developed by the AM & FM Analog Broadcasting (AFAB) Subcommittee of the NRSC, co-chaired by Stanley Salek, Hammett & Edison, Inc., and Gary Kline, Cumulus Media. The NRSC chairman at the time of adoption of NRSC-2-A and NRSC-2-B was Milford Smith, Greater Media, Inc.

The NRSC is jointly sponsored by the Consumer Electronics Association (CEA) and the National Association of Broadcasters (NAB). It serves as an industry-wide standards-setting body for technical aspects of terrestrial over-the-air radio broadcasting systems in the United States.

## CONTENTS

1	SCOPE .....	5
2	REFERENCES .....	5
2.1	Normative Reference.....	5
2.2	Informative Reference Acquisition .....	5
2.3	Informative References .....	5
2.4	Informative Reference Acquisition .....	6
3	INTRODUCTION .....	6
4	RF MASK SPECIFICATION.....	6
4.1	Purpose .....	6
4.2	RF Mask.....	6
4.3	Measurement Procedure.....	8
4.3.1	Use of Ordinary Program Material.....	8
4.3.1.1	Use of Audio Tones .....	8
4.3.2	Use of Spectrum Analyzer .....	8
5	ALTERNATE MEANS OF COMPLIANCE DETERMINATION.....	9

## TABLES

<i>Table 1: RF Mask for Analog AM Broadcast Station Spectrum Occupancy.....</i>	<i>7</i>
---	----------

## FIGURES

<i>Figure 1. Analog AM Broadcast RF Emission Limits .....</i>	<i>7</i>
<i>Figure 2. Analog AM Broadcast RF Emission Limits (Expanded Scale).....</i>	<i>8</i>

## EMISSION LIMITATION FOR ANALOG AM BROADCAST TRANSMISSION

### 1 SCOPE

The National Radio Systems Committee (NRSC) is a joint committee composed of interested parties including representatives of AM broadcast stations, AM receiver manufacturers, and broadcast equipment suppliers. This document describes a voluntary national standard that specifies radio frequency spectrum occupancy for AM broadcast stations. The Standard applies to both AM monophonic and AM stereo transmissions. For hybrid AM IBOC operations, the AM IBOC spectral occupancy specifications contained in NRSC-5 (and subsequent revisions) apply; note that the NRSC-5 requirements are more stringent than those described in this Standard.

The Federal Communications Commission (FCC) specifies analog AM spectral occupancy limits that are similar to the mask specified in Section 3 of this Standard—see 47 CFR §73.44.<sup>1</sup> Compliance with this Standard is strictly voluntary. Broadcaster compliance with FCC specifications is not voluntary. The NRSC adopted the original Standard with the goal of reducing the amount of interference in the AM band.

### 2 REFERENCES

#### 2.1 Normative Reference

The following normative references are incorporated by reference herein. At the time of publication the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this Standard are encouraged to investigate the possibility of applying the most recent editions of these Standards and/or the references listed below. In case of discrepancy, normative references shall prevail.

- [1] *NRSC-5-C, In-band/on-channel Digital Radio Broadcasting Standard*, National Radio Systems Committee, September 2011.
- [2] *Doc No. SY\_SSS1082s rev. F, HD Radio AM Transmission System Specifications*, iBiquity Digital Corporation, 8/24/11.

#### 2.2 Informative Reference Acquisition

Documents [1] and [2] are available free of charge via the NRSC website at:  
<http://www.nrscstandards.org>.

#### 2.3 Informative References

The following references contain information that may be of interest to those implementing this Standards document. At the time of publication the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this Standard are encouraged to investigate the possibility of applying the most recent editions of the standards listed below.

- [1] *Bandwidth Options for Analog AM Broadcasters*, NRSC-G100, September, 2007
- [2] *Consumer Testing of AM Broadcast Transmission Bandwidth and Audio Performance Measurements of Broadcast AM Receivers*, NPR Labs, September 8, 2006
- [3] *Summary Report: Consumer Testing of AM Broadcast Transmission Bandwidth and Audio Performance Measurements of Broadcast AM Receivers*, NRSC-R101, December 2006
- [4] Klein, *Modulation, Overmodulation, and Occupied Bandwidth: Recommendations for the AM*

---

<sup>1</sup> Similarly, for hybrid AM IBOC, the FCC specifies AM spectral occupancy limits that are similar to the mask specified in NRSC-5—see 47 CFR §73.404(a).

## NRSC-2-B

*Broadcast Industry*, NRSC-R11, September 11, 1986, pp. 18-23.

- [5] Data sheet, *Model SM-1 AM Splatter Monitor*, Delta Electronics (obtained 8/12 at <http://www.deltaelectronics.com/data/sm1data.htm>)

### 2.4 Informative Reference Acquisition

Documents [1]-[5] are available free of charge via the NRSC website at: <http://www.nrscstandards.org>.

## 3 INTRODUCTION

On January 10, 1987, the NRSC authorized the NAB and the Electronic Industries Association (EIA) to publish a voluntary national standard specifying AM preemphasis, AM deemphasis and a 10 kHz analog AM audio bandwidth (Standard No. NRSC-1). The NRSC-1 audio standard applies to the analog audio signals that are intended to modulate the AM transmitter. (For information concerning the analog portion of hybrid AM IBOC, see normative references [1] and [2].) Its purpose is to reduce second-adjacent channel interference by band limiting AM stations to a nominal 20 kHz occupied radio frequency (RF) bandwidth (twice the 10 kHz audio bandwidth presented to the transmitter's modulation circuits), or, in the case of hybrid AM IBOC, to also control the interaction between the analog and digital portions of the hybrid IBOC signal. Implementation of the NRSC-1-B audio standard alone largely achieves this purpose. However, there remain characteristics of the AM transmission process that may cause the RF occupied bandwidth to exceed a nominal 20 kHz. This document addresses these transmission characteristics.

## 4 RF MASK SPECIFICATION

### 4.1 Purpose

The purpose of this RF mask specification is to control the spectral energy of an analog AM transmission resulting from modulation and intermodulation products that fall outside the necessary bandwidth of an analog AM broadcast signal modulated with 10 kHz (or less) bandwidth-limited audio.

### 4.2 RF Mask


The RF mask specification indicates the maximum allowed peak energy per 300 Hz of spectrum with respect to the center frequency of the AM carrier. Measurement is to be made by employing the "peak hold" function on a spectrum analyzer over a minimum ten minute period.<sup>2</sup> The specification encompasses all spectral components caused by direct programming and all ancillary or data communications, with the exception of hybrid AM IBOC operation, which is subject to a more stringent specification in NRSC-5, as amended from time to time. Analog AM broadcast stations shall occupy spectrum according to the maximum specifications indicated in Table 1. See Figure 1 and Figure 2.

---

<sup>2</sup> It is recognized that the appearance of the waveform on the spectrum analyzer depends on the shape of the analyzer's RBW filters; however the distinctions among such filters in currently available analyzers do not materially affect the results of RF mask testing.

**Table 1: RF Mask for Analog AM Broadcast Station Spectrum Occupancy**

Frequency band relative to carrier (± kHz)	Attenuation relative to carrier (dB)
0 to 10.2	0
10.2 to 20	at least 25 <sup>3</sup>
20 to 30	at least 35
30 to 60	-at least (5 + 1 dB/kHz) from carrier <sup>4</sup>
60 to 75	at least 65 <sup>4</sup>
Above 75	at least 80 <sup>4</sup>

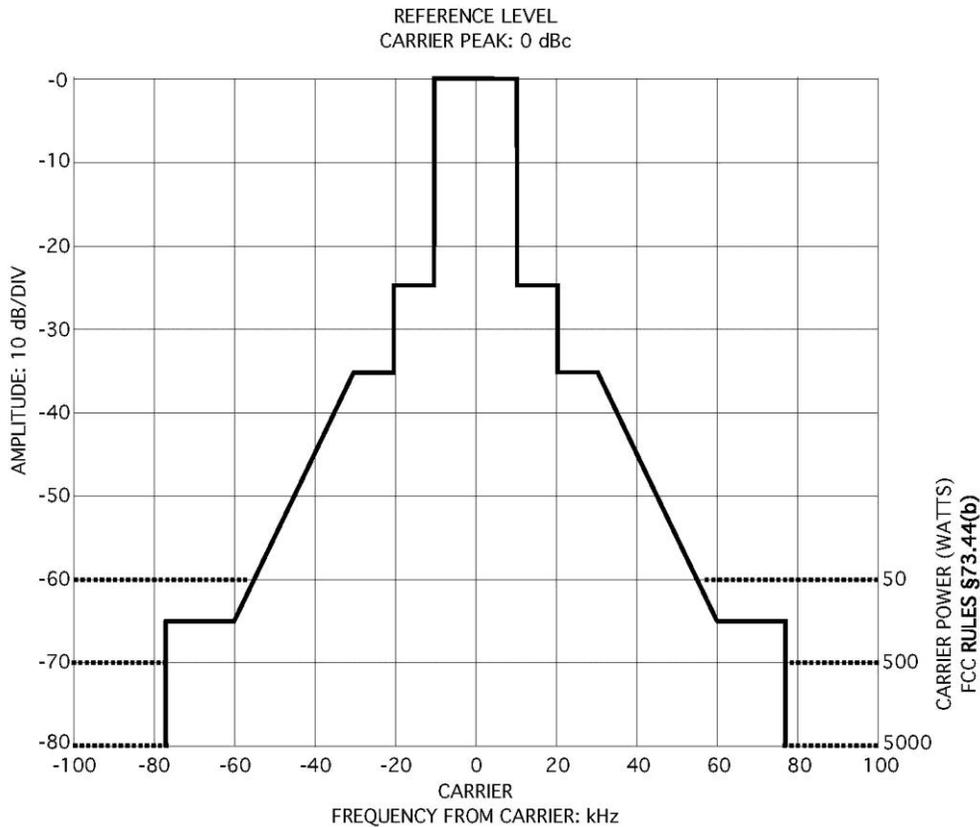


**Figure 1. Analog AM Broadcast RF Emission Limits**

<sup>3</sup> The slope of occupied bandwidth in the transition region between 10 and 11 kHz is defined by the NRSC-1-B audio standard. Accordingly, attenuation levels in the region would be 6 dB greater than described in the audio standard to adjust for carrier level reference. As of NRSC-2-A, the transition region above 10 kHz has been modified to conform with the FCC specification of 10.2 kHz.

<sup>4</sup> For carrier power levels between 158 and 5000 watts, the minimum attenuation from carrier reference level for emissions more than 75 kHz from carrier frequency shall be (43 + 10logP<sub>w</sub>) dB (where P<sub>w</sub> is the carrier power in watts) or as indicated in Table 1, whichever is lesser attenuation. For carrier power levels less than 158 watts, a 65 dB minimum attenuation shall apply.

## NRSC-2-B

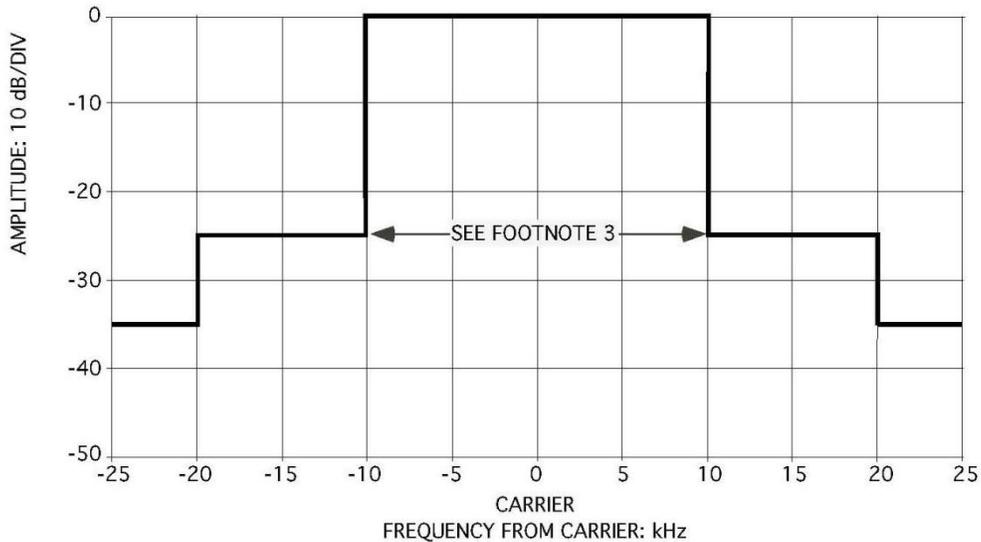

**Figure 2. Analog AM Broadcast RF Emission Limits (Expanded Scale)**

### 4.3 Measurement Procedure

#### 4.3.1 Use of Ordinary Program Material

Measurements of AM station spectrum occupancy shall be conducted using ordinary program material. All audio processing used in the AM station shall be in normal operating modes. The audio signal input to the AM transmitter shall conform to the NRSC-1 audio bandwidth standard as amended from time to time.

##### 4.3.1.1 *Use of Audio Tones*

Sweeping a transmission system with audio tones is a widely accepted and respected method for gauging spectrum occupancy and for troubleshooting and adjusting AM transmission systems. The NRSC endorses audio tones for these purposes, but urges caution in the use and selection of audio tones particularly with AM stereo transmission.<sup>5</sup> It should be noted, however, that it is difficult to infer the dynamic response of a transmission system while observing it in a steady-state condition.

#### 4.3.2 Use of Spectrum Analyzer

A suitable swept-frequency RF spectrum analyzer shall be used to measure compliance with the NRSC RF mask specification. The analyzer shall measure the over-the-air RF spectrum occupancy as perceived in the far field (*i.e.*, at least 10 wavelengths from the antenna center). Some caution should be used in measuring spectrum occupancy with directional antennas.<sup>6</sup>

The analyzer's setup shall consist of:

- a. 300 Hz resolution bandwidth (RBW)
- b. 5, 10, or 20 kHz/horizontal division (as appropriate)
- c. 10 dB/vertical division

<sup>5</sup> The manufacturer of the particular AM stereo system employed should be consulted for the appropriate tone frequencies/modulation levels for "worst case" condition testing.

<sup>6</sup> See informative reference [4].

## NRSC-2-B

- d. Reference: carrier peak
- e. Peak hold: 10 minute duration minimum
- f. No video filter (or set to at least 3 times the RBW)

### 5 ALTERNATE MEANS OF COMPLIANCE DETERMINATION

While the spectrum analyzer method described in Section 4.3.2 defines the prescribed procedure for demonstrating compliance with the NRSC RF mask specification, other equivalent (and potentially lower cost) methods may be employed. For example, a "splatter monitor" device was developed shortly after the initial release of this Standard (see informative reference [5]) that is capable of continuously monitoring compliance with RF mask characteristics. This type of device employs a receiver with added circuitry that analyzes the demodulated audio signal for the presence of components within the stopband region. At a minimum, such a device must (1) employ the NRSC-1-B deemphasis characteristic, and (2) have the capability to detect in-phase and quadrature amplitude signal components that may be found in the defined stopband region. The NRSC encourages further development of alternative devices to verify RF mask compliance that utilize either direct RF detection or demodulation of analog audio components.

It is noted that hybrid AM IBOC broadcast stations employ technology that is compliant with the NRSC-2-B RF mask specification. However, the spectrum analyzer method employed to determine compliance for such stations differs from that used for analog-only stations. In such cases, the power spectral density of the combined analog and digital signals must be averaged in a 300 Hz bandwidth over a 30-second segment of time. Additionally, sampling detection (rather than peak hold detection) must be utilized. See normative references [1] and [2] for further information. As for measurement of the analog-only transmission mask, the NRSC encourages development of alternative devices to verify hybrid AM IBOC RF mask compliance.

NRSC-2-B

NRSC Document Improvement Proposal

If in the review or use of this document a potential change appears needed for safety, health or technical reasons, please fill in the appropriate information below and email, mail or fax to:

National Radio Systems Committee  
c/o Consumer Electronics Association  
Technology & Standards Department  
1919 S. Eads St.  
Arlington, VA 22202  
FAX: 703-907-4190  
Email: [standards@ce.org](mailto:standards@ce.org)

DOCUMENT NO.	DOCUMENT TITLE:	
SUBMITTER'S NAME:	TEL:	
COMPANY:	FAX:	
	EMAIL:	
ADDRESS:		
URGENCY OF CHANGE: _____ Immediate _____ At next revision		
PROBLEM AREA (ATTACH ADDITIONAL SHEETS IF NECESSARY): a. Clause Number and/or Drawing: b. Recommended Changes: c. Reason/Rationale for Recommendation:		
ADDITIONAL REMARKS:		
SIGNATURE:		DATE:
<b>FOR NRSC USE ONLY</b>		
Date forwarded to NAB S&T:	_____	
Responsible Committee:	_____	
Co-chairmen:	_____	
Date forwarded to co-chairmen:	_____	



**CEA**<sup>®</sup>  
Consumer Electronics Association

